

Time: 3 Hours

Total Marks: 80

- Question-1 is compulsory.
- Answer any three from remaining five questions.
- Assume any suitable data, wherever required, but justify the same. Assumptions made should be clearly stated.
- Illustrate the answers with sketches, wherever required.

I Answer any four of the following:

- Draw stress-strain diagram for ductile material and explain its salient points. (05)
- A simply supported beam of length 3m and cross section 100mm (width)×200mm (depth) carrying a uniformly distributed load of 4kN/m. Neglecting weight of beam. Determine maximum bending stress and maximum shear stress in beam. (05)
- State the assumptions made in bending. Also state bending formula. (05)
- Determine the maximum shear stress developed in a hollow circular shaft with internal diameter 50mm and external diameter 80mm, which transmits power of 15kW at a speed of 300rpm. (05)
- Determine moment of inertia of the shaded area of the section given below (Fig.1) about centroidal x-x axis. (05)

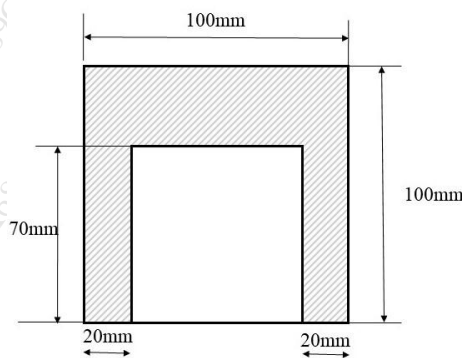


Fig.1

- State the assumptions made in Euler's theory made in analysis of columns with its limitation. (05)
- II a) A hollow steel shaft 150mm internal diameter and 300mm external diameter, it is to be replaced by solid shaft. If polar section modulus has the same value for both shafts, calculate: the diameter of solid shaft and ratio of torsional rigidities. Modulus of rigidity (G) for hollow shaft is two times modulus rigidity (G) of solid shaft. Assume same length for both shafts. (10)



